
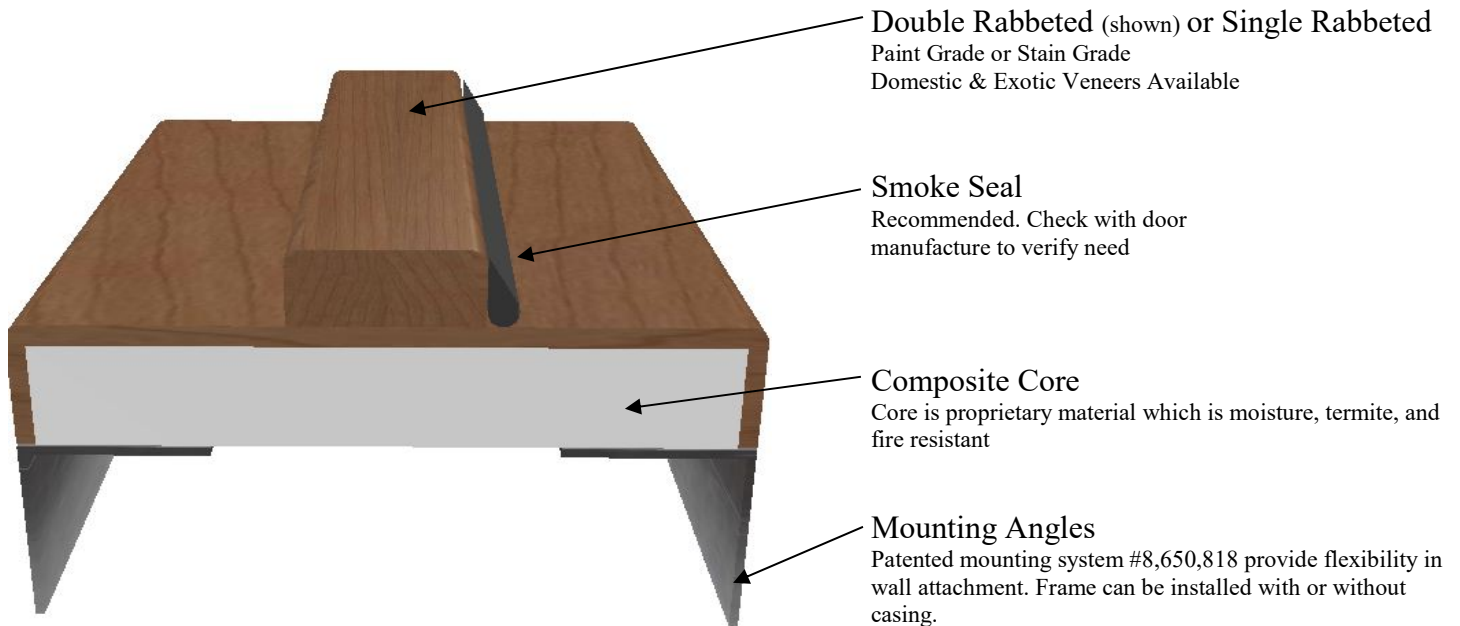


Wood Veneered 45-60 Min. Fire Frame

**GRANDDOOR
FRAMES**
Specialty & Fire-rated Wood Door Frames



GRANDDOOR Fire Rated Frame 45-60 Minute Specifications

- **Material:** Fire rated composite core with wood veneer
- **Fire Rating:** Positive Pressure 45-60 Minutes
- **Max Size:** Up to 4'0" x 9'0" (single) & 8'0" x 9'0" (pairs)
- **Jamb Thickness:** 13/16" an up
- **Minimum Wall Thickness:** 4-1/2"
- **Veneer Options:** Paint Grade | Alder | Anigre | Birch | Cherry | Ebony | Fir | Mahogany | Maple | Pine | White Oak | Red Oak | Sapele | Teak | Walnut | plus exotic veneers.
- **Fire Door compatibility:** Pairs with ANY fire rated wood door (Category A or B)
- **Finishes:** Primed, unfinished and stain finished
- **Warranty:** 5 Year Limited Warranty
- **Manufacturing Location:** USA
- **Listing Agency:** QAI Laboratories (meets UL 10B and UL 10C standards)
- **Gasketing:** Surface-applied smoke gasket must be applied to frame to achieve "S" rating
- **Stop:** Minimum jamb door stop - 1-1/4" wide x 1/2" high
- **Custom Capabilities:** Yes

