


Wood Veneered 45-60 Min. Fire Frame



GRANDDOOR Fire Rated Frame 45-60 Minute Specifications

- **Material:** Fire rated composite core with wood veneer
- **Fire Rating:** Positive Pressure 45 Minutes & 60 Minutes
- **Max Size:** Up to 4'0" x 9'0" or 3'6" x 10'0 (single) & 7'0" x 8'0" (pairs)
- **Jamb Thickness:** 3/4" and up
- **Minimum Wall Thickness:** 4-1/2"
- **Veneer Options:** Paint Grade | Alder | Anigre | Birch | Cherry | Ebony | Fir | Mahogany | Maple | Pine | White Oak | Red Oak | Sapele | Teak | Walnut | Wenge | plus exotic veneers.
- **Laminate Options:** Wilsonart, Formica or others.
- **Fire Door compatibility:** Pairs with ANY fire rated wood door (Category A or B)
- **STC Sound Rated:** Yes
- **Finishes:** Primed, unfinished and stain finished
- **Warranty:** 2 Year Limited Warranty
- **Manufacturing Location:** USA
- **Listing Agency:** QAI Laboratories (meets UL 10B and UL 10C standards)
- **Gasketing:** Surface-applied smoke gasket must be applied to frame to achieve "S" rating
- **Stop:** Minimum jamb door stop - 1-1/2" wide x 5/8" high
- **Sidelites/Transoms:** Yes (contact for details)

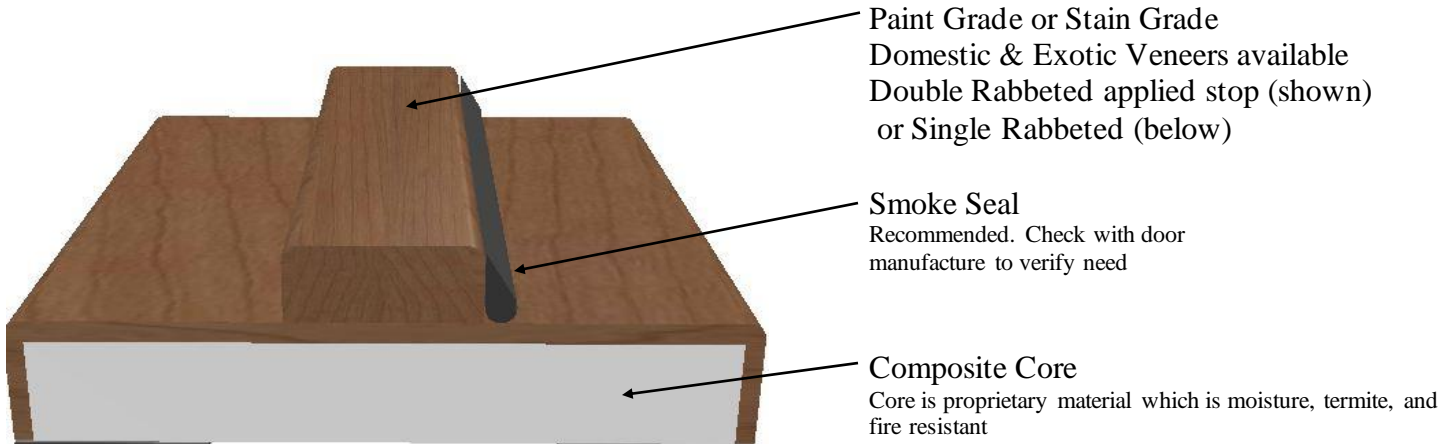