


Standard Wood Door Jambs



GRANDDOOR Standard Jamb Specifications

- **Material:** FJ Pine (for priming) or optional Solid Wood or veneered (based on project needs)
- **Max Size:** Up to 4'0" x 10'0" (single) & 8'0" x 10'0" (pairs). Larger sizes upon request.
- **Jamb Thickness:** 11/16" and up
- **Minimum/Max Wall Thickness:** None
- **Custom Capabilities:** Yes
- **Veneer Options:** Paint Grade | Alder | Anigre | Birch | Cherry | Ebony | Fir | Mahogany | Maple | Pine | White Oak | Red Oak | Sapele | Teak | Walnut | Wenge | + exotic veneers.
- **Machining Capabilities:** All preps can be performed at factory.
- **Fire Rating:** All jambs can be up to 90 minute fire rated (Not applicable to this spec sheet)
- **Finishes:** Primed, unfinished and stain finished
- **Warranty:** 2 Year Limited Warranty
- **Manufacturing Location:** San Antonio, TX USA
- **Listing Agency:** QAI Laboratories (meets UL 10B and UL 10C standards)
- **Gasketing:** As determined per project (by others)
- **Double Rabbet Stop:** Standard door stop - 1-3/8" wide x 7/16" high or larger
- **Single Rabbet Stop:** Standard door stop determined by width of jamb
- **Sidelites/Transoms:** Yes (contact for details)

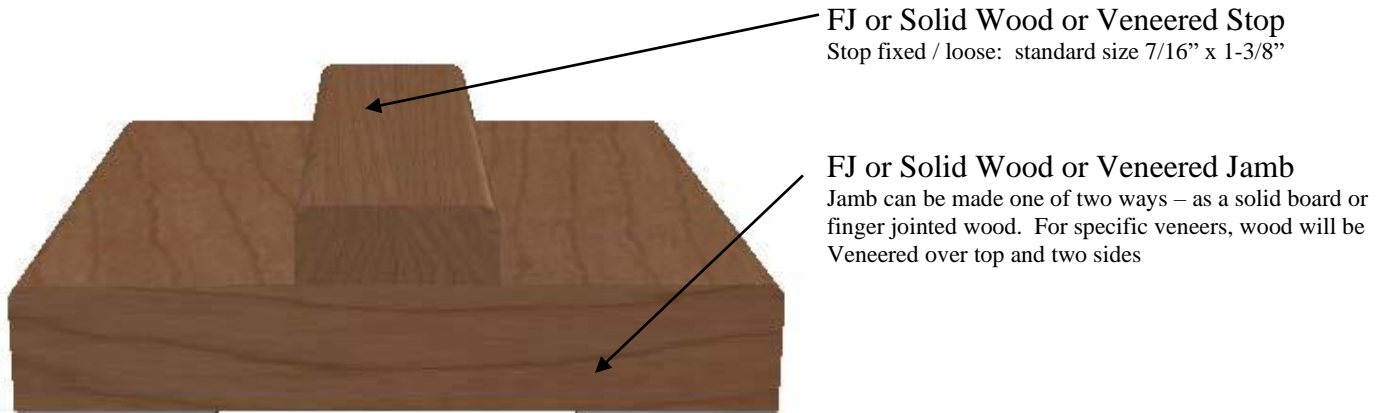